

CV100F-Cover Series Common Mode Choke

12uH-25uH, Current 3.0A-6.4A



CHARACTERISTICS


- & The core is made of Mn-Zn Ni-Zn
- & Decrease the noise by using at 100kHz to 100MHz
- & Increase the anti-EMI ability
- & Working at -40 °C to +125°C

Electronic Specification


MN code	Rated current per winding (A)	Inductance Per winding (uH+50%/-30%)	DC resistance (Ω)	Suggest PCB hole (mm)
173722	3.0	12	10	Φ0.85
173611	6.4	25	3.35	Φ1.2

Remark: Testing conditions at 20°C, 10.0kHz, 0.1V; Testing voltage : 1500Vac – 50Hz, 3 sec, Related voltage: 250V-50Hz and +60°C ambient temperature

Dimension (In mm)

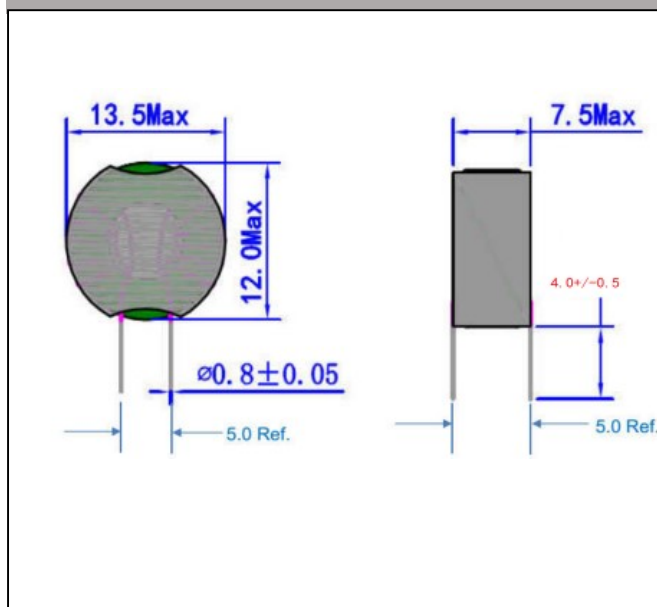

Schematic

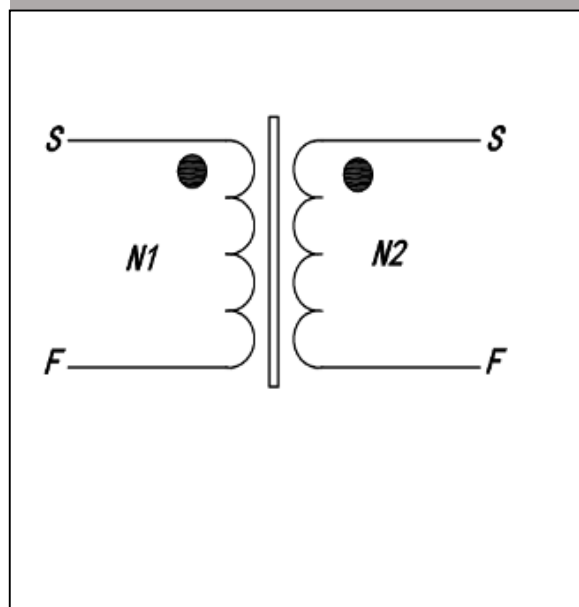

We are ready to customize any of our standard products to meet your specific design need!