


- Constant voltage charger for lead acid batteries
- Max. charge current 500 mA
- Suitable for charging of small, sealed lead acid batteries, e.g. 1,5-4 Ah
- Thermal fuse in transformer, thermal protection in regulator
- Plug-in unit
- LED indicates charging
- Exchangeable DC plugs
- Konstantspenningslader for blybatterier
- Maks. ladestrøm 500 mA
- Egnet for lading av mindre, forseglede blybatterier, f.eks. 1,5-4 Ah
- Termosikring i transformator, termisk beskyttelse i regulator
- Plugg-inn enhet
- Lysdiode indikerer lading
- Utskiftbare DC plugger




Technical specifications*

Tekniske data*

Input voltage:	Inngangsspenning:	230 VAC +6/-10%, 50/60Hz
Leakage current from battery when mains switched off:	Strømtrekk fra batteri ved frakoblet nett:	< 0,1 mA
Temperature range:	Temperaturområde:	-10°C - +40°C
Current limiting:	Strømbegrensning:	500 mA
Insulation class:	Isolasjonsklasse:	II
Electrical safety standard:	Elektrisk sikkerhetsstandard:	EN 60065, EN 60950
EMC standards	EMC standarder	
• Emission:	• Emisjon:	EN 61000-6-3
• Immunity:	• Immunitet:	EN 61000-6-1
Output terminals	Utgangsterminaler	
• Cord with/without plug:	• Sek. ledning med/uten plugg:	Tilbehør / Accessories
Dimensions without plug (LxWxH):	Mål uten plugg (LxBxH):	95 x 51 x 57 mm
Weight:	Vekt:	370 g

* The unit is internally adjustable and at float charge the voltage should be adjusted to 13,6-13,9 V for 12 V battery. For 24 V battery (27,2-27,8) and 6 V battery (6,7-6,9). In cycle use it's recommended to charge 12 V batteries with 14,6-15 V. If there should be any doubt about the charging condition for a particular battery, contact the battery manufacturer or supplier for more information. /
Enheden er innvendig justerbar og ved vedlikeholdslading bør spenningen justeres ned til 13,6-13,9 V for 12 V batteri. For 24 V batteri (27,2-27,8) og 6 V batteri (6,7-6,9). Det er vanligvis anbefalt å lade 12 V blybatterier med 14,6-15 V ved daglig bruk. Skulle det være usikkerhet m.h.t. et bestemt batteri, anbefaler vi at man kontakter batteriproducent eller leverandør.

Diagram 14,7 version
Diagram 14,7 versjon

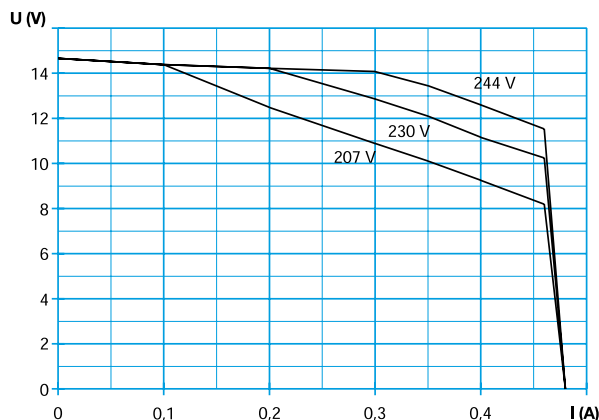

Voltage version - Spenningsversjon (VDC)

Version	Max. load (mA)
7	500
14,7	500